

Motivation

Data structures are often needed to provide organization for large sets of data.

However, traditional approaches offer a tradeoff between insertion/deletion and search performance:

Contiguous storage (e.g., a sorted array):

- search cost proportional to $\log(N)$ where N is the number of data elements
- insert/delete cost proportional to N

Linear linked storage (e.g., a linked list):

- search cost proportional to N
- constant insert/delete cost

Balanced binary trees (e.g., an AVL tree):

- search cost proportional to $\log(N)$
- insert/delete cost proportional to $\log(N)$

Unfortunately, balanced binary tree implementations are quite complicated.


We'd like similar performance with less complexity...

The Skip List Concept

Linear linked structures are relatively simple to implement, and well-understood.

We can improve search costs by adding some additional pointers to selected nodes to allow "skipping" over nodes that can safely be ignored.

Consider:

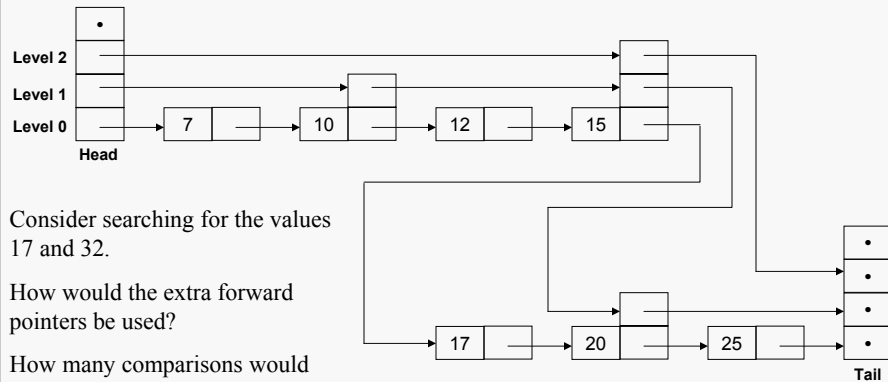

Consider searching for the values 17 and 32.

How would the extra forward pointers be used?


How many comparisons would be required?

"Skip lists: a probabilistic alternative to balanced trees", CACM, W. Pugh, 1990

Search Example

Skip Lists 3

Consider searching for the value 17:

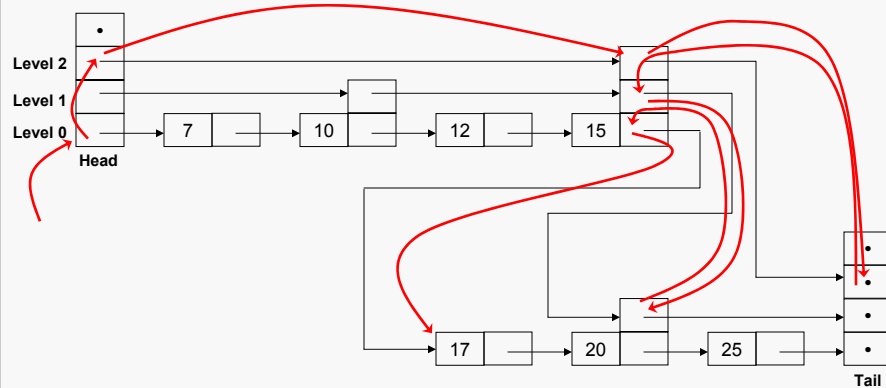

By using the extra pointers, we can jump over the first half of the list, and then determine that the value does not lie within the fourth quarter of the list. A careful count of operations doesn't show any advantage for this tiny list, but...


Terminology

Skip Lists 4

We can view the list as consisting of a hierarchy of parallel, intersecting sub-lists or levels.

Level 1 is a subset of level 0, level 2 a subset of level 1, and so forth.

By convention, we say each node belongs to level $K-1$ if it contains K forward pointers.

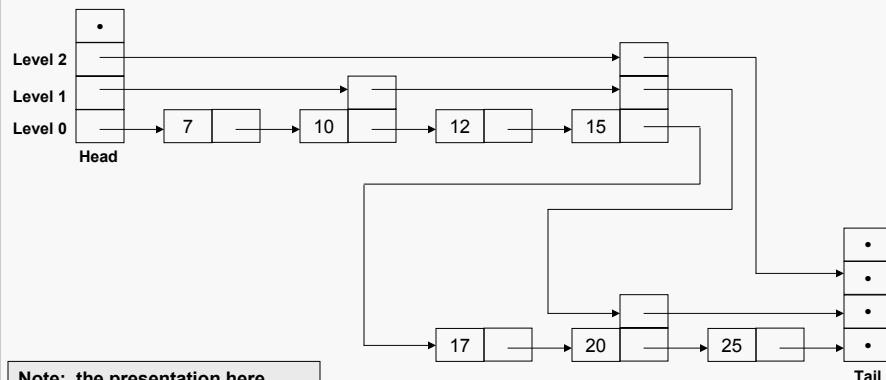


Note: the presentation here treats the tail of the structure differently than in Shaffer.

Modifying the List

Skip Lists 5

Unfortunately, inserting new nodes into this "ideal" skip list structure is very expensive.

Consider inserting the value 8:

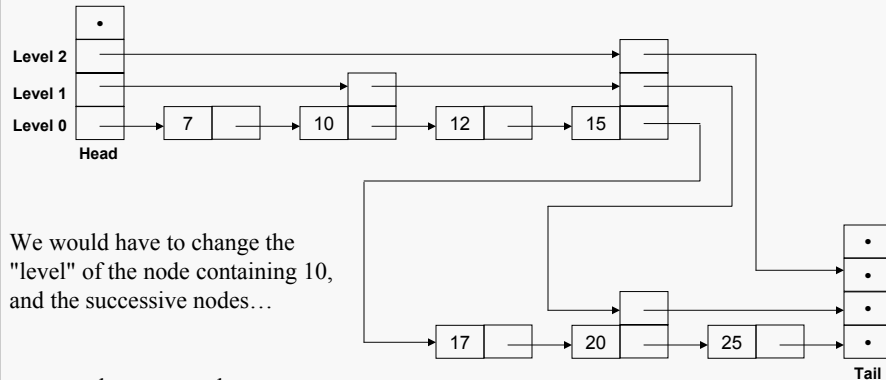

We would have to change the "level" of the node containing 10, and the successive nodes...

... must the structure be so regular in order to provide improved performance?

Probabilistic Insertion

Skip Lists 6

In the "ideal" skip list:

- 1/2 the nodes are in level 0, 1/4 in level 1, 1/8 in level 2, and so forth.
- nodes in level 0 point to the next node; nodes in level 1 to the next and second-next node; nodes in level 2 to the next, second-next and fourth-next nodes; and so forth
- the level of a node is determined entirely by its position in the list


We can reduce the cost of insertion by:

- selecting a random level for the new node, so that the proportion of level 0, level 1, etc., nodes is roughly preserved
- level 0 nodes point to the next node;
- level 1 nodes also point to the next node that belongs to level 1 or higher;
- level 2 nodes also point to the next node that belongs to level 2 or higher;
- ... and so forth


Insertion Example

Skip Lists 7


Empty list configured to provide 4 levels:



Insert the value 10; assume that level 1 is selected:




Insert the value 5 at level 0 and then insert the value 7 at level 0:

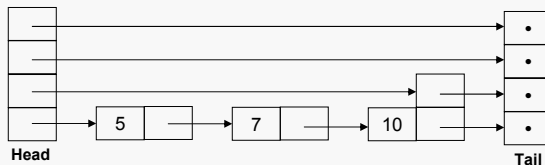


Insertion Example Continued

Skip Lists 8

Insert the value 12 at level 2:

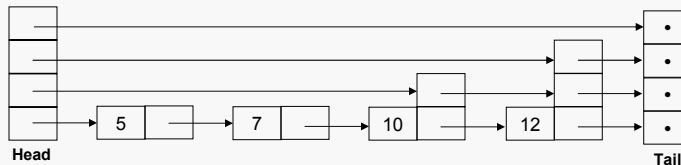

And then insert the value 15 at level 1:

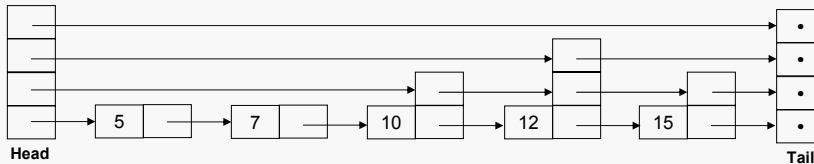


Consider searching for a few values, say 7 and 15. In the former case, there's no advantage over a simple list; in the latter, there's a substantial advantage.

Insertion Details

Skip Lists 9

Consider inserting the value 8 into the skip list below, and assume that the new node is assigned to level 2:

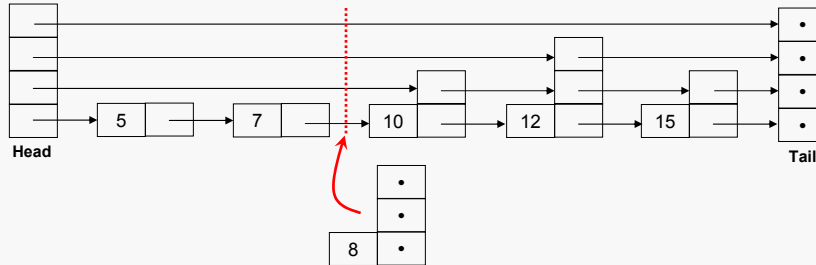

The first step is to search for the largest value already in the list that is less than or equal to the new value. The new node will become the level-0 successor of that existing node.

To complete the insertion, we must modify pointers to and from the new node.

But which pointers need to be modified?


Precisely the pointers that break the dashed line and are at a level containing the new node.

Remembering "Passing" Pointers

Skip Lists 10

During the search phase, we must remember the nodes that contain pointers that "go past" the insertion point for the new node.

To do this, we need an array that can hold up to $N + 1$ node pointers, where N is the maximum number of levels among the existing list nodes.

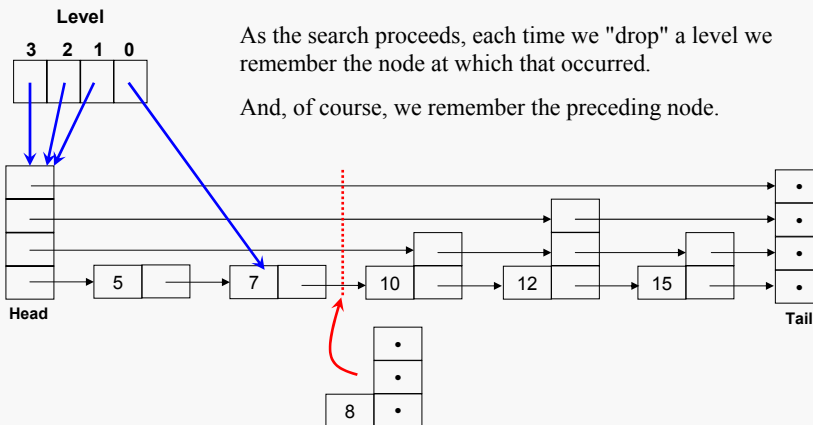


As the search proceeds, each time we "drop" a level we remember the node at which that occurred.

And, of course, we remember the preceding node.

Updating Pointers During Insertion

Skip Lists 11

At this point we have sufficient information to perform the necessary pointer updates.

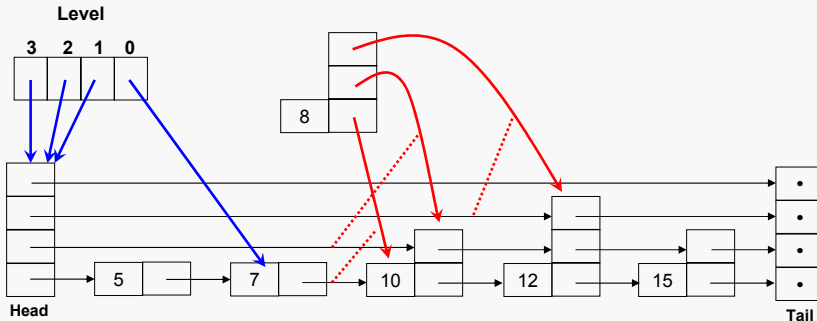


The pointers from the new node are set using the pointers identified earlier, taking into account the levels.

Updating Pointers During Insertion

Skip Lists 12

Then, the pointers to the new node are set, again taking levels into account:

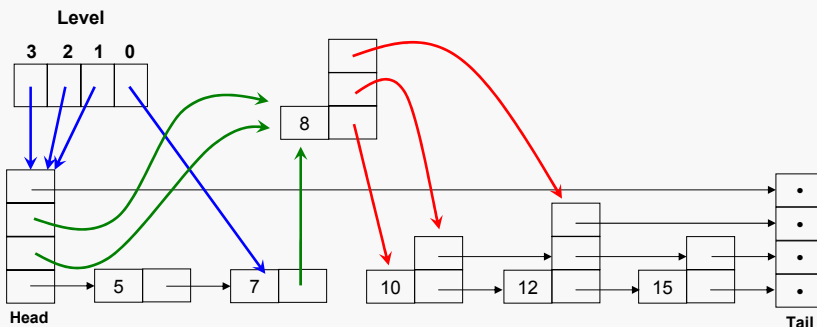

In practice, resetting the pointers from and to the new node would be interleaved so only one pass through the list of "passed" pointers is needed.

Insertion Algorithm

Skip Lists 13

Given a data value (that may or may not occur in the list):

```
Node* Update[MaximumLevel]      ; for remembering "pass" nodes
Node* x := &HeadNode;

for i := MaximumLevel downto 0 do

    ; go as far as possible on current level
    while x->forward[i]->keyField < searchKey do
        x := x->forward[i]
    endwhile

    ; search level will now change
    Update[i] := x                ; remember node for updating later
    ; drop to previous level (via for loop)
endfor

x := x->forward[0]                ; predecessor is in next Node
. . .
```

Adapted from Pugh, 1990

Insertion Algorithm

Skip Lists 14

The first part of the algorithm has found the predecessor node, now it's time for the physical insertion:

```
. . .
if x->keyField = searchKey then
    ; take action for case of duplicate key value
else
    Lvl := randomLevel()          ; select random level for new node
    if Lvl > MaximumLevel then ; adjust if list needs new level
        for i := MaximumLevel + 1 to Lvl do
            Update[i] := &HeadNode
        endfor
        MaximumLevel := Lvl
    endif
    ; create new node
    x := makeNode(Lvl, searchKey, Data)
    ; patch it into the list, updating "pass" pointers
    for i := 0 to MaximumLevel do
        x->forward[i] := Update[i]
        Update[i]->forward[i] := x
    endfor
endif
```

Choosing the Level for a New Node

Skip Lists 15

Each new node may be given a randomly-chosen level, but that will almost certainly be disastrous because it will lead to lots of unnecessary levels.

There are a number of schemes for restricting the level selection without sacrificing the degree of randomness that is necessary to achieve a high probability of good performance.

One approach is to "cap" the number of levels; for example if we allow no more than 32 levels then in principle the list can store 2^{32} data values.

Another approach is "don't worry, be happy". Trust a sensible random scheme to work out well enough.

In any case, we do want some sort of exponential distribution:

```
int randomLevel() {
    int Level;
    for (Level = 0; rand() % 2 == 0; Level++);
    return Level;
}
```

Search Performance

Skip Lists 16

It should be intuitively clear that the "ideal" skip list would give essentially the same search performance as a binary search; i.e., the average number of comparisons would be proportional to $\log(N)$.

But what about the "practical" skip list? Clearly the irregular pattern will not necessarily be terribly similar to the "ideal" distribution.

In the paper cited on slide 2, Pugh proves that, with high probability, the average number of comparisons would be proportional to $\log(N)$ for the "practical" skip list as well.

That is, there is no guarantee that a skip list will always (or ever) provide highly efficient search, but in all likelihood a skip list will provide search costs that are at least roughly competitive with balanced binary tree structures.

Why consider using a skip list? Primarily because the implementation is far simpler than that of a good balanced binary tree.

Search Algorithm

Skip Lists 17

Given a data value (that may or may not occur in the list):

```
Node* x := &HeadNode;
for i := MaximumLevel downto 0 do
    ; go as far as possible on current level
    while x->forward[i]->keyField < searchKey do
        x := x->forward[i]
    endwhile
    ; drop to previous level (via for loop)
endfor
x := x->forward[0] ; step to next Node
if x->keyField = searchKey then
    return x->Data
else
    return failure
endif
```

The search logic here assumes some relational operators have been supplied for the key type and some convention for returning an indication of failure.

Adapted from Pugh, 1990

Skip List Deletion

Skip Lists 18


Logically, deleting a node should be the opposite of insertion. The same basic principles apply:

- first we must find the node that precedes the node to be deleted, if any, remembering the nodes containing "pass" pointers
- if the succeeding node contains the targeted key value
 - update the "pass" pointers that point to the target node
 - delete the targeted node
- if necessary, adjust the head node to reduce the number of levels in the list

Deletion Example

Skip Lists 19

Consider deleting the value 10 from the list below:

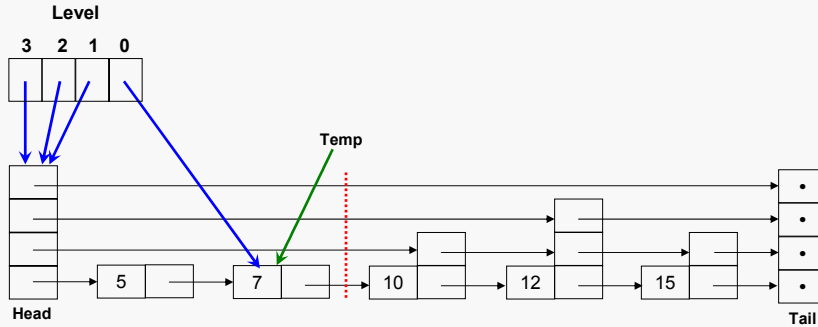


First we must find the preceding node and identify the nodes whose pointers may need to be reset.

Deletion Example Continued

Skip Lists 20

Next we must reset the pointers to the targeted node "around" it:

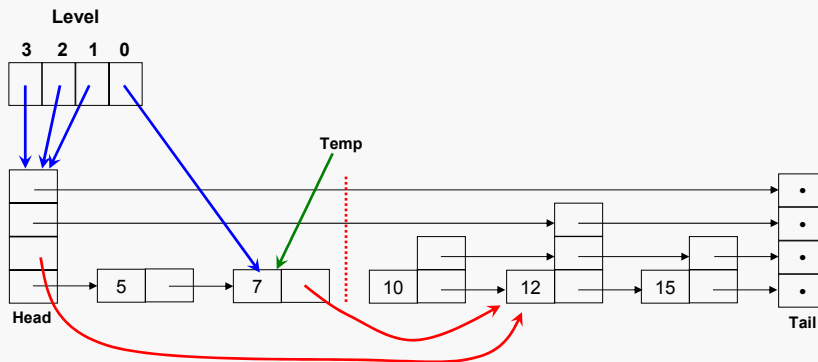

Finally, we must deallocate the targeted node.

Insertion and deletion both begin with a search, which will probably have cost proportional to $\log(N)$.

Following the search, the number of pointers that must be updated is no more than twice the number of levels in the list, which should not be much more than $\log(N)$ if level assignments to new nodes have been done intelligently.

The remaining work (reducing the head structure, etc.) are essentially constant cost...

...aside from the node deletion, which involves a system call. However, deletions are generally less expensive than allocations.

So, it is reasonable to expect that the cost of insertion and deletion will be proportional to $\log(N)$.