Syntax

In Text: Chapter 3

Outline

- Syntax:
  - Recognizer vs. generator
  - BNF
  - EBNF

Basic Definitions

- Syntax—the form or structure of the expressions, statements, and program units
- Semantics—the meaning of the expressions, statements, and program units

- Why write a language definition; who will use it?
  - Other language designers
  - Implementors (compiler writers)
  - Programmers (the users of the language)

What is a "Language"?

- A sentence is a string of characters over some alphabet
- A language is a set of sentences
- A lexeme is the lowest level syntactic unit of a language (e.g., *, sum, begin)
- A token is a category of lexemes (e.g., identifier)

Recognizers vs. Generators

- We don't want to use English to describe a language (too long, tedious, imprecise), so ...
- There are two formal approaches to describing syntax:
  - Recognizers
    - Given a string, a recognizer for a language L tells whether or not the string is in L (ex: Compiler)
  - Generators
    - A generator for L will produce an arbitrary string in L on demand. (ex: Grammar, BNF)
  - Recognition and generation are useful for different things, but are closely related

Grammars

- Developed by Noam Chomsky in the mid-1950s
- 4-level hierarchy (0-3)
- Language generators, meant to describe the syntax of natural languages
- Context-free grammars define a class of languages called context-free languages (level 2)

Backus–Naur Form

- Invented by John Backus and Peter Naur to describe syntax of Algol 58/60
- BNF is equivalent to context-free grammars
- A metalanguage: a language used to describe another language

BNF Nonterminals

- In BNF, abstractions are used to represent classes of syntactic structures—they act like syntactic variables (also called nonterminal symbols)

  <while_stmt> -> while <logic_expr> do <stmt>

- This is a rule; it describes the structure of a while
- statement

BNF Rules

- A rule has a left-hand side (LHS) and a right-hand side (RHS), and consists of terminal and nonterminal symbols
- A grammar is a finite nonempty set of rules
- An abstraction (or nonterminal symbol) can have more than one RHS:

<stmt> -> <single_stmt>
    | begin <stmt_list> end

- Syntactic lists are described using recursion:

<ident_list> -> ident
    | ident, <ident_list>

An Example Grammar

<program> -> <stmts>
<stmts> -> <stmt>
    | <stmt> ; <stmts>
<stmt> -> <var> = <expr>
<var> -> a | b | c | d
<expr> -> <term> + <term>
    | <term> - <term>
<term> -> <var>
    | const

Derivations

- A derivation is a repeated application of rules, starting with the start symbol and ending with a sentence (all terminal symbols):

<program> => <stmts>
=> <stmt>
=> <var> = <expr>
=> a = <expr>
=> a = <term> + <term>
=> a = <var> + <term>
=> a = b + <term>
=> a = b + const

Sentential Forms

- Every string of symbols in the derivation is a sentential form
- A sentence is a sentential form that has only terminal symbols
- A leftmost derivation is one in which the leftmost nonterminal in each sentential form is the one that is expanded next in the derivation
- A rightmost derivation works right to left instead
- Some derivations are neither leftmost nor rightmost

Parse Trees

- A parse tree is a hierarchical representation of a derivation
- A grammar is ambiguous iff it generates a sentential form that has two or more distinct parse trees

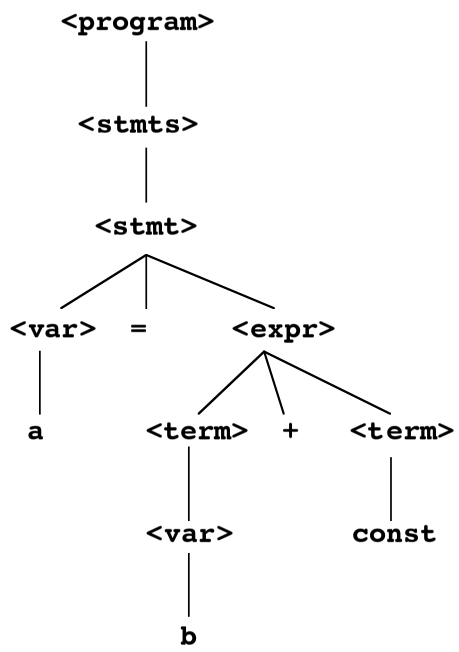

Ambigous Grammars

- An ambiguous expression grammar:

<expr> -> <expr> <op> <expr> | const

<op> -> / | -

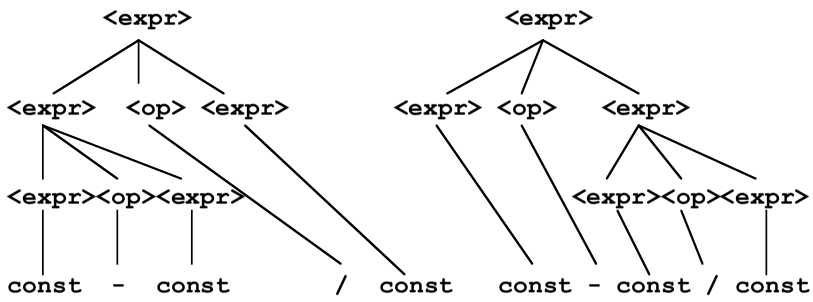

Indicating Precedence

- If we use the parse tree to indicate precedence levels of the operators, we cannot have ambiguity:

<expr> –> <expr> – <term> | <term>

<term> –> <term> / const | cons

```
<expr> => <expr> - <term>
       => <term> - <term>
       => const - <term>
       => const - <term> / const
       => const - const / const
```

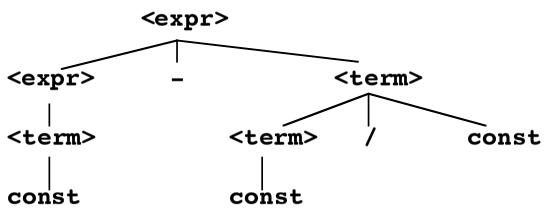

Operator Associativity

- Operator associativity can also be indicated by a grammar

<expr> –> <expr> + <expr> | const (ambiguous)

<expr> –> <expr> + const | const (unambiguous)

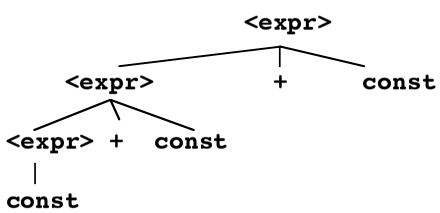

Extended BNF (EBNF)

- Optional parts are placed in brackets ([])

  <proc_call> -> ident [(<expr_list>)]

- Put alternative parts of RHS in parentheses and separate them with vertical bars

  <term> -> <term> (+ | -) const

- Put repetitions (0 or more) in braces ({})

  <ident> -> letter {letter | digit}

BNF and EBNF Side by Side

- BNF:

  <expr> -> <expr> + <term>
  | <expr> - <term>
  | <term>
  <term> -> <term> * <factor>
  | <term> / <factor>
  | <factor>

- EBNF:

  <expr> -> <term> {(+ | -) <term>}
  <term> -> <factor> {(* | /) <factor>

Recursive Descent Parsing

- Parsing is the process of tracing or constructing a parse tree for a given input string
- Parsers usually do not analyze lexemes; that is done by a lexical analyzer, which is called by the parser
- A recursive descent parser traces out a parse tree in top-down order; it is a top-down parser
- Each nonterminal in the grammar has a subprogram associated with it; the subprogram parses all sentential forms that the nonterminal can generate
- The recursive descent parsing subprograms are built directly from the grammar rules
- Recursive descent parsers, like other top-down parsers, cannot be built from left-recursive grammars

Recursive Descent Example

- Example: For the grammar:
- <term> -> <factor> {(* | /) <factor>}
- Simple recursive descent parsing subprogram:

```
void term() {
  factor();  /* parse the first factor*/
  while (next_token == ast_code ||
      next_token == slash_code) {
    lexical();  /* get next token */
    factor();  /* parse the next factor */
  }
}
```